

# Elsafe Sentinel II

## Electronic Safes

Vingcard goes beyond the ordinary with the Elsafe Sentinel II in-room safe series. We have taken in-room security to a new level and combined it with a functional and trendy design, delivering the same unmatched security standards we are known for.

Sentinel II blends into any environment and is the perfect in-room safe for the quality and design conscious properties.



## FEATURES

- : EPD (Environmental Product Declaration) certified\*
- : UL-1037 Certified for physical strength and security
- : REACH, RoHS and Prop 65 compliant
- : Industry-leading audit trail (500 events)
- : Information stored in non volatile memory
- : Reprogrammable configurations
- : ADA (Americans with Disabilities Acts) compliant telephone style keypad
- : 4 digit guest code
- : LED display for clear visible numbers
- : Unique error and service codes on safe display
- : Green backlit keypad
- : Internal light
- : Remember PIN code for re-lock
- : Powered with five (5) AA batteries.
- : Low battery warning
- : Easy external battery change
- : Spring loaded door
- : Accommodates up to 17" laptop in certain models
- : Serviced by service tablet or laptop with an interface cable and unique service code
- : Anti tamper labyrinth
- : Internal carpet
- : Unique triangular locking bolt enforcement
- : Easy maintenance
- : Attractive ergonomic design

- : Revolutionary locking system with interlocking deadbolt mechanism
- : One piece cold pressed curved door (over 70% stronger than flat steel door)
- : Extended solid steel bolt hinges for maximum security and durability
- : Solid arc welded heavy gauge steel construction for superior strength and security

### Optional features

- : Anti-tamper switch
- : Rental mode by activation code
- : Power outlet inside the safe
- : AC power supply (Batteries as back-up)
- : Customization: steel box color or changed of depth

**vingcard**  
**ASSA ABLOY**

Experience a safer  
and more open world

SPECIFICATIONS



ANTI-TAMPER LABYRINTHS PROTECT OUR SAFES' ELECTRONICS FROM MANIPULATION.



ELSAFE'S REVOLUTIONARY LOCKING SYSTEM RESISTS FORCIBLE ENTRY.



1 Close door & press RESET  
2 Enter your 4 digit code  
3 Press LOCK  
4 Open by using your code

vingcard  
ASSA ABLOY

Elsafe



ONE-PIECE COLD-PRESSED DOOR IS OVER 70% STRONGER THAN FLAT STEEL DOOR.




EXTENDED SOLID STEEL BOLT HINGES ARE SECURE AND ULTRA-RELIABLE.

**Elsafe Service Tools**  
A service tablet or a laptop is used with an interface cable and a unique service code. The service tool is also utilizing a software called Safelink for Windows for synchronizing programming between the service tools and safes. For instance, to securely override, uploading programs, change settings or transfer data to the electronic safes.



**Power Outlets**  
Optional internal power outlet in different types (EU, UK, US or Universal with USB).

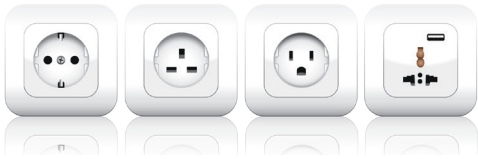

**PinKey**  
PinKey is a compact electronic PIN code protected key to securely override and service Elsafe safes. This service tool must be combined with a USB docking cable and the Admin software to commission, service open a safe and print out events.



Measurements		Sentinel II 25	Sentinel II 41	Sentinel II 49
Outside H/W/D	mm	206/437/260	206/437/421	206/437/502
Incl. keyboard	in	8 <sup>1/8</sup> /17 <sup>3/16</sup> /10 <sup>3/16</sup>	8 <sup>1/8</sup> /17 <sup>3/16</sup> /16 <sup>5/8</sup>	8 <sup>1/8</sup> /17 <sup>3/16</sup> /19 <sup>13/16</sup>
Inside H/W/D	mm	202/433/168	202/433/330	202/433/411
	in	7 <sup>15/16</sup> /17 <sup>1/16</sup> /6 <sup>9/16</sup>	7 <sup>15/16</sup> /17 <sup>1/16</sup> /13	7 <sup>15/16</sup> /17 <sup>1/16</sup> /16 <sup>3/16</sup>
Door dimensions	mm	148/320	148/320	148/320
H/W	in	5 <sup>13/16</sup> /12 <sup>5/8</sup>	5 <sup>13/16</sup> /12 <sup>5/8</sup>	5 <sup>13/16</sup> /12 <sup>5/8</sup>
Internal volume	litres	14,1	27,7	34,5
	cu ft	0,50	0,98	1,22
Weight	kg	11,6	15,1	17,4
	lb	23,8	33,3	38,4

H/W/D: Height/Width/Depth

Color	Standard
Body color	Black Gray RAL 7021
Frame color	Silver
Front	Silver

Steel Thickness	
Door	2,5 mm
Body	2 mm
Back-wall	2,5 mm

Mounting options	
Back-wall	3 holes
Bottom	4 holes



\*EPD Certification does not apply to the models Sentinel II 25 & Sentinel II 41